Upright water heater (10 bar)

HTP PREMIUM

160 / 200 / 300 / 400 / 500 LITRES

> **The anode tester enables the function and consumption of the magnesium anode without interrupting the operation of the storage tank.technically reliable by measuring the check.**

Misprints and technical changes reserved!

TECHNICAL DATA

- Operating pressure 10 bar
- Capacity: 160 L, 200 L, 300 L, 400 L, 500 L
- Vacuum panels at 400 and 500 L
- Energy-saving HFO foam insulation
- Smooth-tube heat exchanger with particularly large heating surfaces
- Hot water outlet to the top guaranteed complete ventilation
- High-quality dial thermometer
- Blind flange (D 180 mm, DN 110) and flange insulation hood
- All storage tanks incl. 1½“ socket (factory sealed at the factory) for screw-in radiators Type series SH
- Adjustable support feet
- 3 immersion tubes for sensor positioning

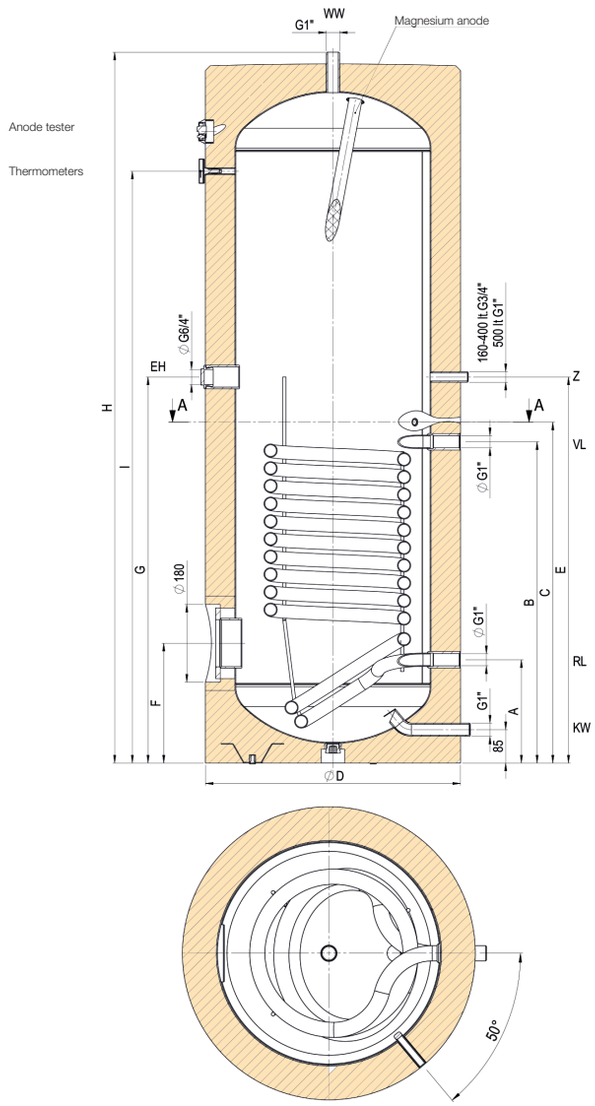

ACCESSORIES

- Height-adjustable feet included
- Flange heating Ø 180 mm
- Safety and non-return valve DL-SVRV
- Finned tube heat exchanger

TECHNICAL DATA

Type	Article no.	Dimensions in mm									Anode in mm	Heat exch-anger surface m²	Tilt dimen-sion in mm	SID in mm	FID in mm	Weight in kg
		H	Dø	A	B	C	E	F	G	I						
HTP 101 PREMIUM	A 288 22	1131	650	263	503	583	668	305	668	828	ø 33 x 300	0,60	1290	520	180/450	81
HTP 201 PREMIUM	A 289 17	1353	650	263	638	688	870	305	695	1050	ø 33 x 430	1,00	1485	520	180/450	93
HTP 301 PREMIUM	A 256 82	1810	650	263	818	868	983	305	983	1507	ø 33 x 600	1,40	1905	520	180/450	122
HTP 401 PREMIUM	A 267 46	1847	720	320	925	975	1045	345	1000	1521	ø 33 x 700	1,80	1965	590	180/490	154
HTP 501 PREMIUM	A 299 34	1838	790	370	930	980	1050	370	1095	1498	ø 33 x 700	2,00	1982	670	180/580	171

SID: Installation depth of screw-in heating sleeve for SH heater FID: Flange installation depth (for built-in heating or finned tube heat exchanger)