

Smart Control-Speicher (6 bar)

ECO CLEVER


80 / 100 / 120 /

150 LITRE

“

Depending on the usage behaviour, energy savings of up to 14 % are possible with the smart electric storage unit!

”

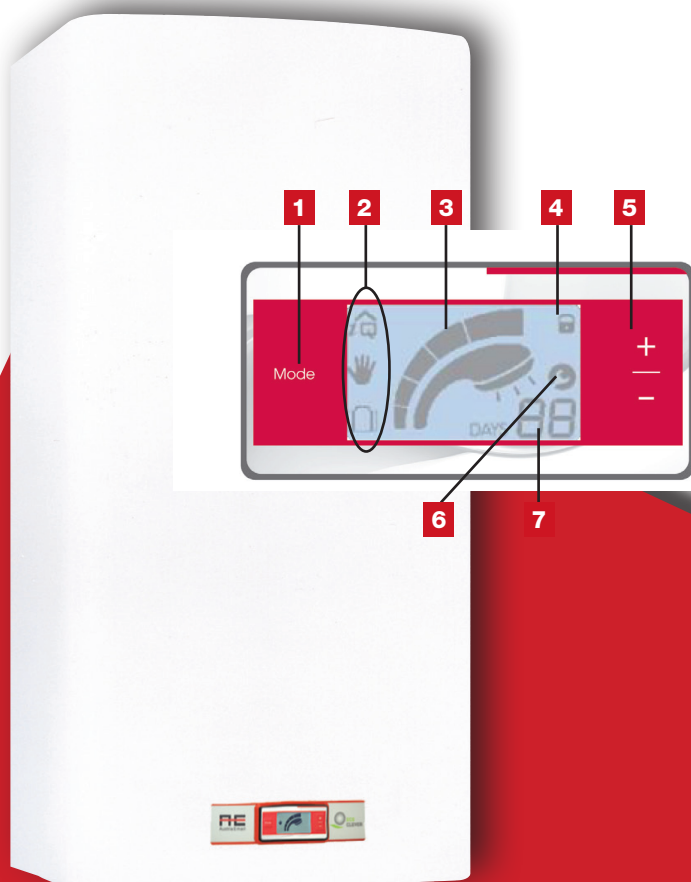


- 1** Selecting the operating mode (ECO, Manual, Holiday)
- 2** Display of the operating mode (ECO, Manual, Holiday)
- 3** Comfort level
- 4** Child lock
- 5** Setting of the level or number of holidays
- 6** Error display
- 7** Number of holidays or error code

TECHNICAL DATA

- Operating pressure 6 bar
- Capacity: 80 L, 100 L, 120 L, 150 L
- Energy savings of up to 14.8 (depending on usage behaviour)
- Adapted to your consumer habits
- ECO energy-saving setting
- Holiday mode
- LCD display
- Automatic legionella protection
- Heating times can be changed
- Thanks to intelligent energy management
- No low tariff operation required
- Adjustable suspension
- 3-year full warranty
- Automatic error detection and warning on the display in case of dry-running, triggered safety temperature limiter, unexpectedly long heating time as well as defective sensors, CPU memory and data lines

ACCESSORIES

- Storage tank connection set AG-S 1/2" up to 6 bar
- Pressure reducing valve for AG-S
- Reinforced suspension bracket for old ÖNORM
- Round bracket suspension - extended by 300 mm
- Ceiling suspension
- Counter plate for suspended accumulator (thin-wall suspension)
- Safety thermostatic mixing valve type 271

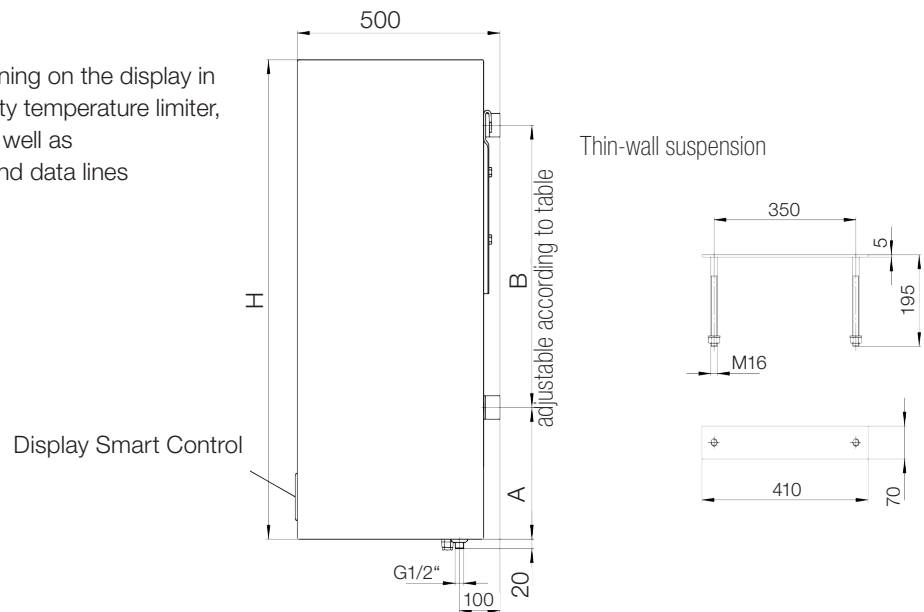

ECO DESIGN-LABELING

5 YEARS WARRANTY ON THE INNER BOILER

Type	Content in l	Heat loss according to EN 12897		Electricity consumption per year in kWh/year	OFF-Peaktable or Smart	Tapping profile	Energy efficiency class
		in kWh/24h	S in watts				
ECO CLEVER 80	80	0,95	39,6	1.316	S	M	B
ECO CLEVER 100	100	1,08	45,0	1.347	S	M	B
ECO CLEVER 120	120	1,23	51,3	1.366	S	M	B
ECO CLEVER 150	150	1,45	60,4	1.352	S	M	B

TECHNICAL DATA

Type	Article.no.	Connected load in kW	Connection voltage in V	Dimensions in mm				Magnesium Protective anode	Maximum temperature in °C	Display	Weight in kg
				H	A	B	B adjustable from-to				
ECO CLEVER 80	A 121 57	2,0	~230	751	280	400	400-550	ja	75	LCD-Display	40
ECO CLEVER 100	A 121 58	2,0	~230	884	280	600	400-700	ja	75	LCD-Display	46
ECO CLEVER 120	A 121 59	2,0	~230	1019	280	600	550-850	ja	75	LCD-Display	52
ECO CLEVER 150	A 121 60	2,0	~230	1219	280	800	750-1000	ja	75	LCD-Display	60