

**Suspended storage (6 bar)**

**VM E**

**50 / 80 / 100 /**

**120 LITRE**

“



Lid with service flap for  
better access to the heating  
element.

”



## TECHNICAL DATA

- Operating pressure max. 6 bar
- Capacity: 50, 80, 100 and 120 litres
- With protective anode, insulated built-in heating elements as well as protective current leakage resistor for optimal corrosion protection.
- Heating time 4 or 6 hours (can be reconnected)
- Integrated wall mounting
- Extended service intervals every 3 years instead of previously 2
- High-quality front panel with integrated control knob
- Adjustment range visible at the front, thus easier
- Adjustment of the hot water temperature
- Cover with service flap for better access to the heating element

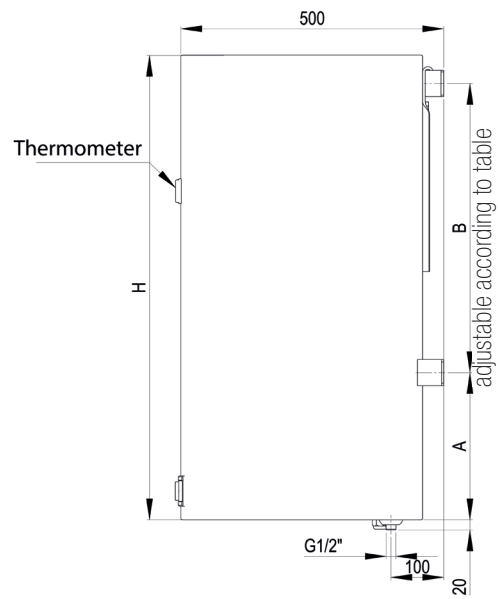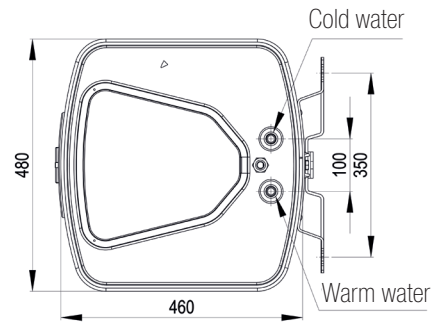

## ACCESSORIES

- Connection set 1/2" AGS (possibly with pressure reducing valve DMV)

## ECO DESIGN-LABELING

**5 YEARS WARRANTY ON THE INNER BOILER**

Type	Content in l	Heat loss according to EN 12897		Electricity consumption per year in kWh/year	OFF-Peaktable or Smart	Tapping profile	Energy efficiency class
		in kWh/24h	S in watts				
<b>VM E 050</b>	50	0,72	30,0	1.396	J	M	<b>C</b>
<b>VM E 080</b>	80	0,95	39,6	1.437	J	M	<b>C</b>
<b>VM E 100</b>	100	1,08	45,0	2.722	J	L	<b>C</b>
<b>VM E 120</b>	120	1,23	51,3	2.751	J	L	<b>C</b>

## TECHNICAL DATA

Type	Article no.	Connected load in kW	Dimensions in mm			Weight in kg
			H	A	B adjustable from-to	
<b>VM E 050</b>	A 138 22	1,20	579	130	400-550	33
<b>VM E 080</b>	A 138 23	1,80	761	280	400-550	40
<b>VM E 100</b>	A 138 24	2,30	894	280	400-700	46
<b>VM E 120</b>	A 138 25	2,80	1029	280	550-850	52