

Electric accumulator (8 bar)

VACUMAIL EXPERT

50 / 80 /

100 LITRE



“



The VACUMAIL EXPERT is
also suitable for regions
with aggressive water!

”

ELECTRIC ACCUMULATOR

TECHNICAL DATA

- Operating pressure 8 bar
- Capacity: 50 L, 80 L, 100 L
- Stepless temperature control up to 65 °C
- Pressure-resistant design for supplying several taps
- Modern design
- Significant reduction of limescale risk due to patented dry heating system made of ceramic
- Suitable for all types of drinking water
- Easy maintenance - when heating elements are replaced the storage tank does not have to be emptied
- Protection class IP 24

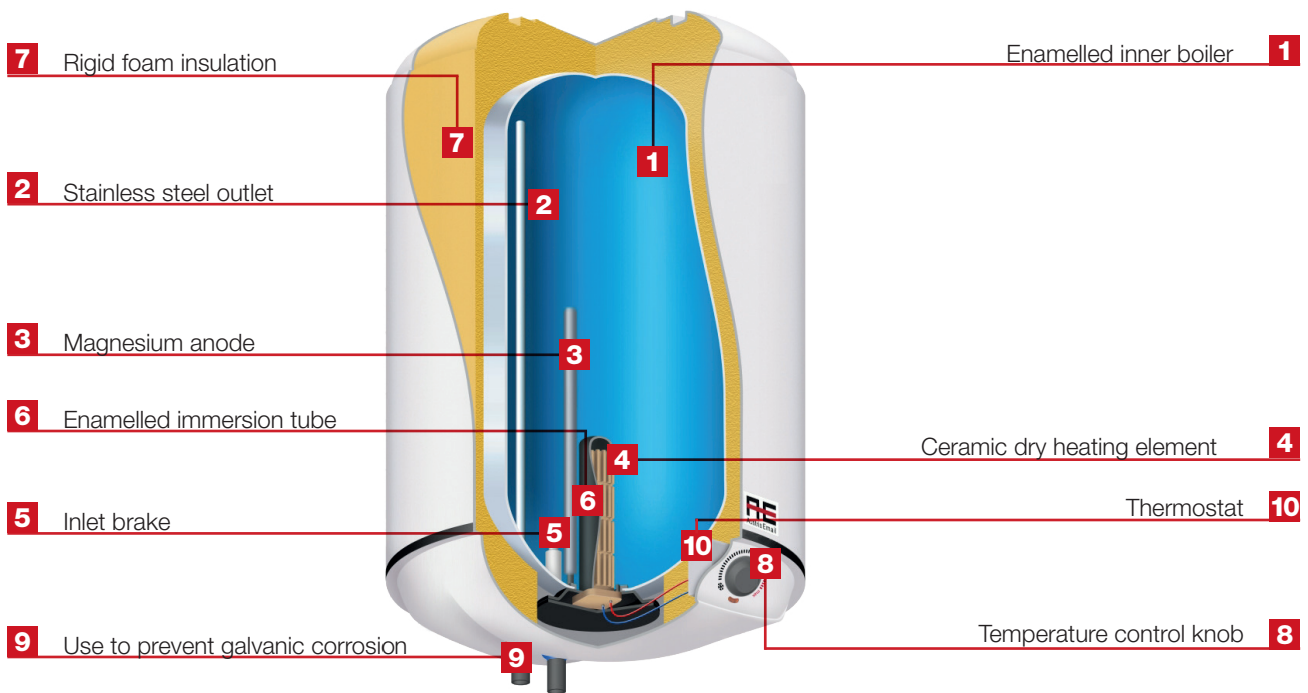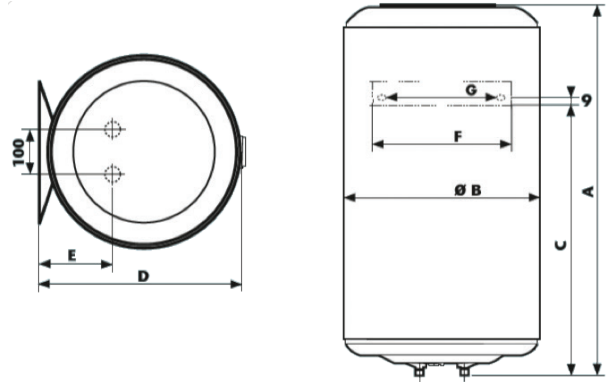

ECO DESIGN-LABELING

2 YEARS WARRANTY

Type	Content in l	Heat loss according to EN 12897		Electricity consumption per year in kWh/year	OFF-Peaktable or Smart	Tapping profile	Energy efficiency class
		in kWh/24h	S in watts				
VACUMAIL EXPERT 50	50	0,81	33,8	1.411	N	M	c
VACUMAIL EXPERT 80	80	1,07	44,6	1.456	N	M	c
VACUMAIL EXPERT 100	100	1,22	50,8	1.321	J	M	c

TECHNICAL DATA

Type	Article no.	Heating time 60°C (Δt=50°C) in h	Connection power in kW ~ 230V	Connection voltage in V	Dimensions in mm								Flange opening ø in mm	Weight in kg
					A	C	D	E	F	G	ø			
VACUMAIL EXPERT 50	A 123 02	1,7	1,5	230 (220/240)	613	380	451	165	100	240	433	72	15	
VACUMAIL EXPERT 80	A 123 03	3,0	1,5	230 (220/240)	860	590	451	165	bis	240	433	72	21	
VACUMAIL EXPERT 100	A 123 04	4,0	1,5	230 (220/240)	1022	740	451	165	280	240	433	72	24	